REV	DESCRIPTION	DESIGN	DATE
A0	Release		2018.01.15

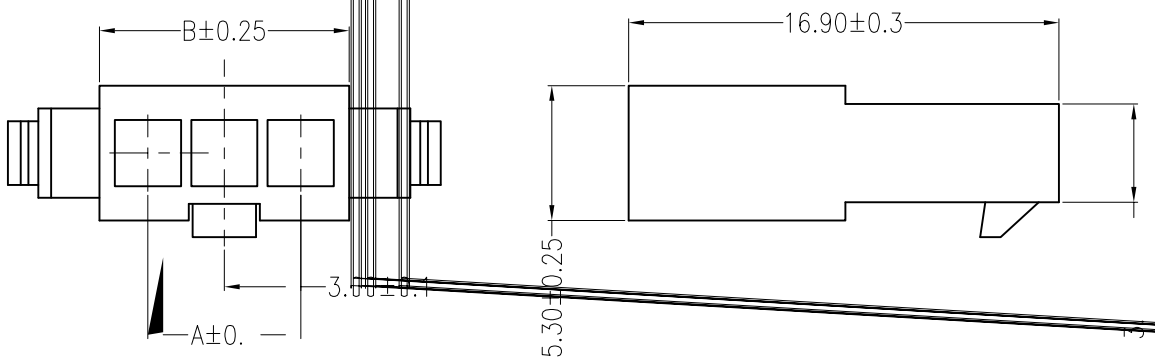

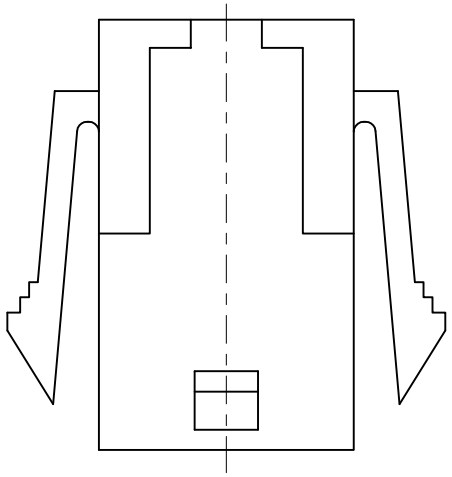

Main Specifications

Poles): 02 to 24
Contact resistance): ≤ 20mΩ
Insulation resistance): ≥ 1000MΩ
Rated voltage):250V AC DC
Rated current):5.0A AC DC
Withstand Voltage) 1000V AC/minute
Temperature Range :-25 +85

ORDER INFORMATION:

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B				
A	PEDESTAL	1 PCS	PA66	COLOR:BLACK

JKUN WENZHOU JKUN CONNECTOR CO.,LTD.			TITLE: – 3.00mmPITCH Housing
X.±0.5	X.±5°	USE: CUSTOMER	PART NO.: C3001R–**–A5K–P
.X±0.3	.X±2°	APPD:	
.XX±0.25	.XX±1°	CHKD:	DWG NO.: JKUN/GCCP–0607
––	––		
	UNITS: mm	DR:	SCALE 1 : 1 / SHEET 1 / 1