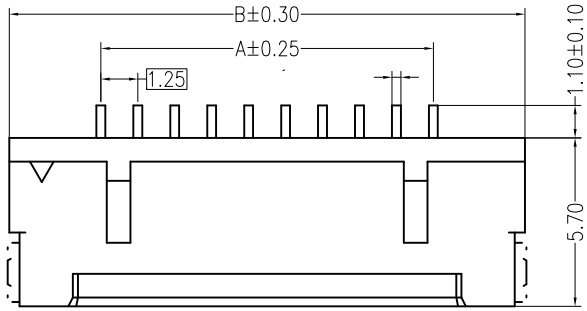



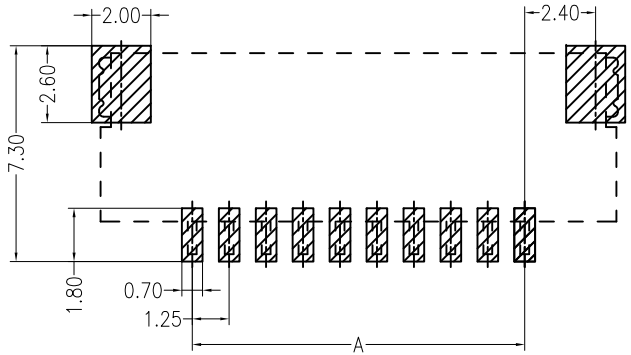

PCB LAYOUT(Tolerance:±0.05)

Specifications:
Poles: 2 to 30
Contact resistance:≤30mΩ
Insulation resistance:≥500MΩ
Rated voltage:150V AC DC
Rated current:1A AC DC
Withstand Voltage: 500V AC/minute
Temperature Range:−25℃～ +85℃
Housing:PA9T UL94V−0,Natural
Contacts:Brass/ MATTE Sn−plated
Solder tabs:Brass/MATTE Sn−plated

JKUN WENZHOU JKUN CONNECTOR CO.,LTD.			TITLE:
GENERAL TOLERANCE		USE:	PART NO.:
X. ±0.50	X. ±5°	APPD:	
X.X ±0.30	X.X ±2°	CHKD:	DWG NO.:
X.XX ±0.20	X.XX ±1°	DR: FangSongLe	SCALE / SHEET
	UNITS: mm		