


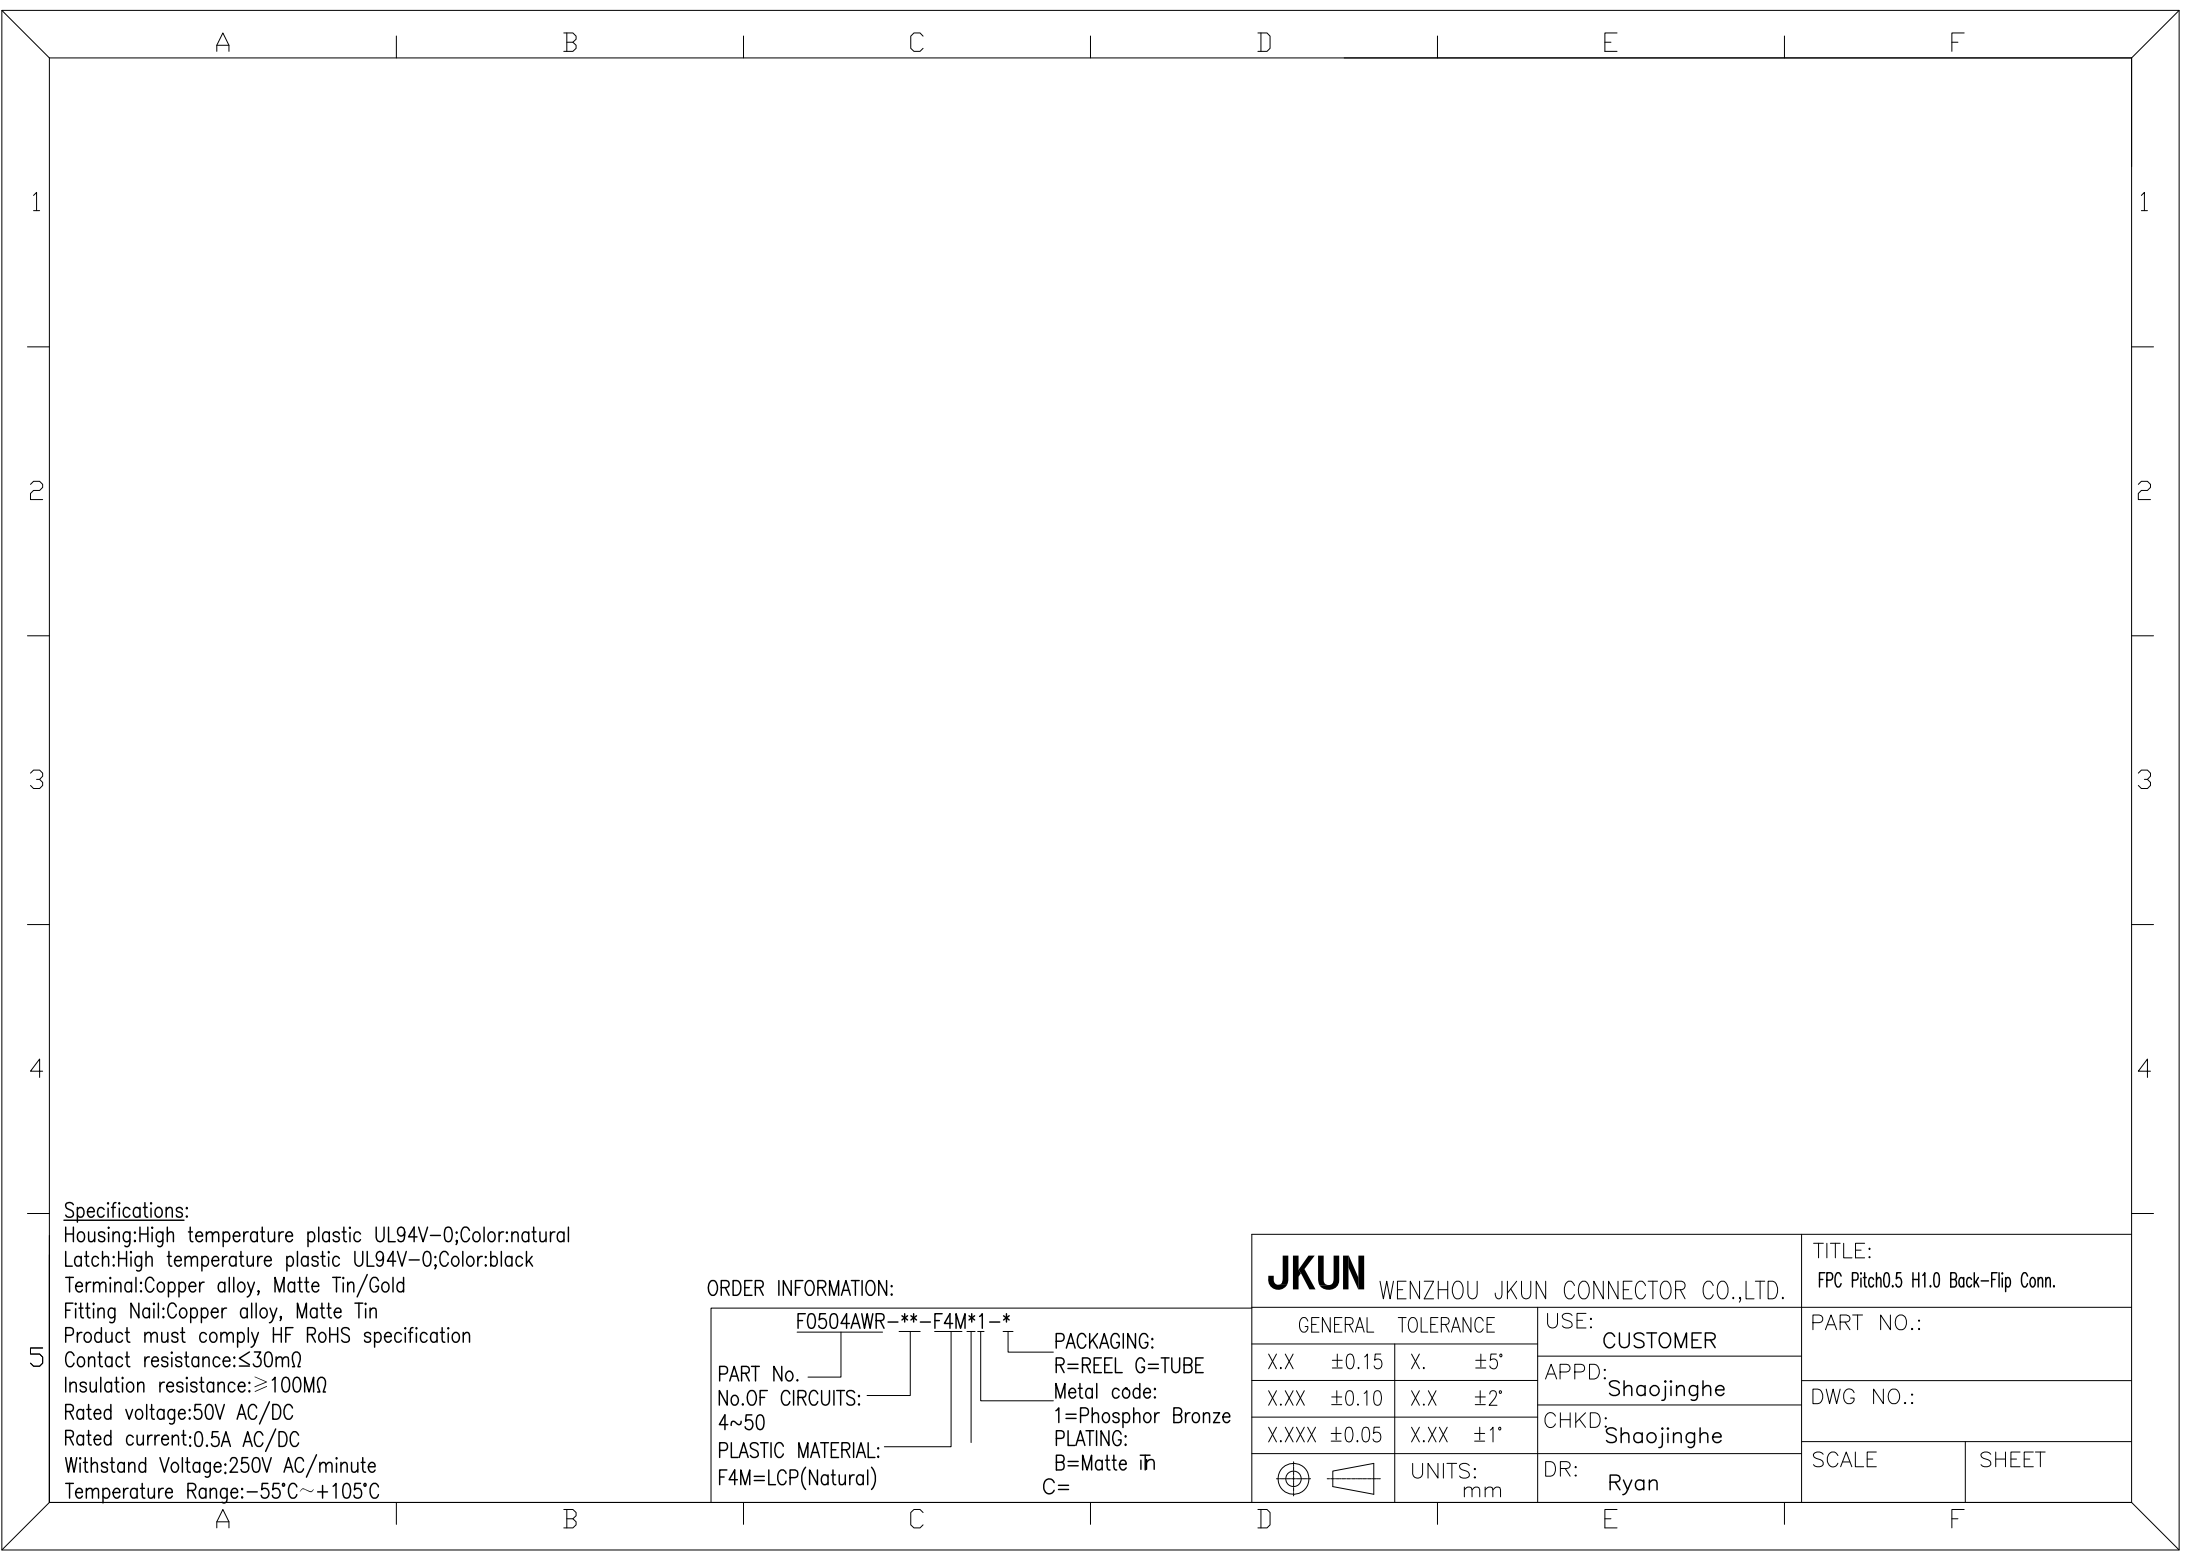

Specifications:
Housing:High temperature plastic UL94V-0;Color:natural
Latch:High temperature plastic UL94V-0;Color:black
Terminal:Copper alloy, Matte Tin/Gold
Fitting Nail:Copper alloy, Matte Tin
Product must comply HF RoHS specification
Contact resistance:≤30mΩ
Insulation resistance:≥100MΩ
Rated voltage:50V AC/DC
Rated current:0.5A AC/DC
Withstand Voltage:250V AC/minute
Temperature Range:-55℃~+105℃

ORDER INFORMATION:

F0504AWR-**-F4M*1-*		PACKAGING: R=REEL G=TUBE Metal code: 1=Phosphor Bronze PLATING: B=Matte Tin C=
PART No.		
No.OF CIRCUITS: 4~50		
PLASTIC MATERIAL: F4M=LCP(Natural)		

JKUN WENZHOU JKUN CONNECTOR CO.,LTD.				TITLE: FPC Pitch0.5 H1.0 Back-Flip Conn.	
GENERAL		TOLERANCE		PART NO.:	
X.X	±0.15	X.	±5°		
X.XX	±0.10	X.X	±2°	DWG NO.:	
X.XXX	±0.05	X.XX	±1°		
				SCALE	
UNITS: mm		DR: Ryan		SHEET	