

Specifications:

Contact resistance: $\leq 20\text{m}\Omega$

Insulation resistance: $\geq 1000\text{M}\Omega$

Rated voltage: 1

ORDER INFORMATION:

Specifications:

Contact resistance $\leq 20\text{m}\Omega$

Insulation resistance $\geq 1000\text{M}\Omega$

Rated voltage AC DC

Rated current AC DC

Withstand voltage 100V AC/minute

Temperature range $-25^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Housing: LCP, UL94V-0, Natural

ORDER INFORMATION:




	C		Brass	Sn-plated
	PEDESTAL	1 PCS	PA66	UL 94V-0, COLOR:WHITE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH




The drawing shows a miniature circuit breaker (MCB) with the following specifications:

- Model: 1P1D 16A 250V
- Rated current: 16A
- Rated voltage: 250V AC DC
- Withstand Voltage: 1000V AC/minute
- Temperature Range: -25 to +85
- Material: PA66
- Finish: UL 94V-0, COLOR: WHITE
- Component: CONTACT
- Quantity: 1 PCS
- Material: Brass
- Finish: Sn-plated

The drawing includes a front view (top) and a side view (bottom). The front view shows the MCB with dimensions: 16mm (width), 16mm (height), and 16mm (depth). The side view shows the MCB with dimensions: 16mm (width), 16mm (height), and 16mm (depth). The drawing is labeled with 'A' through 'F' and '1' through '5'.

			Brass	Sn-plated
			PA66	UL 94V-0, COLOR:BEIGE
ITEM			MA	FINISH

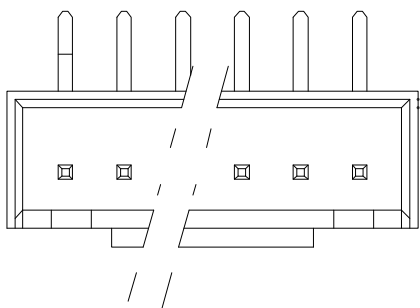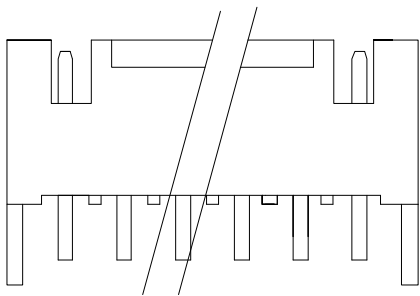

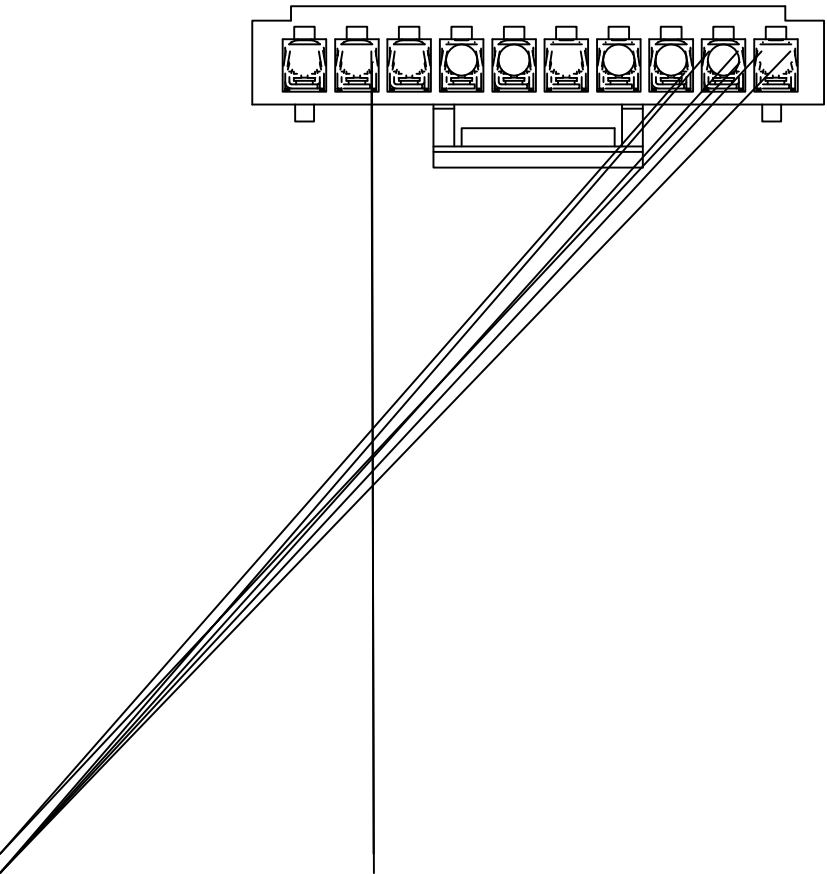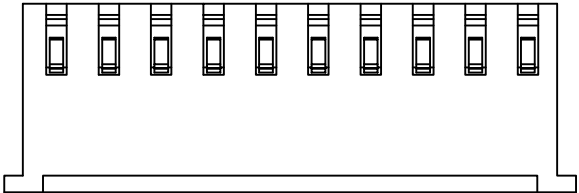

C					
B					
A	PEDESTAL		1 PCS	PA66	COLOR:WHITT
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH

