

A

B

C

D

E

F

REV	ECN No.	DESCRIPTION	DESIGN	DATE

1

1

2

2


3

3

4

4

5

			TITLE:	
X.±0.		USE:	PART NO.:	
		APPD:		
		CHKD:	DWG NO.:	
--	--	DR:	SCALE	SHEET
	UNITS: mm			

A

B

C

D

E

F


Specifications:

Contact resistance: $\leq 20\text{m}\Omega$
Insulation resistance: $\geq 1000\text{M}\Omega$
Rated voltage: 125V AC DC
Rated current: 2.0A AC DC
Withstand voltage: 500V AC/minute
Temperature range: $-40^{\circ}\text{C} \sim +120^{\circ}\text{C}$
Housing: LCP, UL94V-0, Natural
Contacts: Phosphor Bronze/Matte Sn
Solder tabs: Brass/Matte Sn

ORDER INFORMATION:

A2007AWR-**-F5MB1-*

PART No.
No. Of CIRCUI
02~08
PLAS

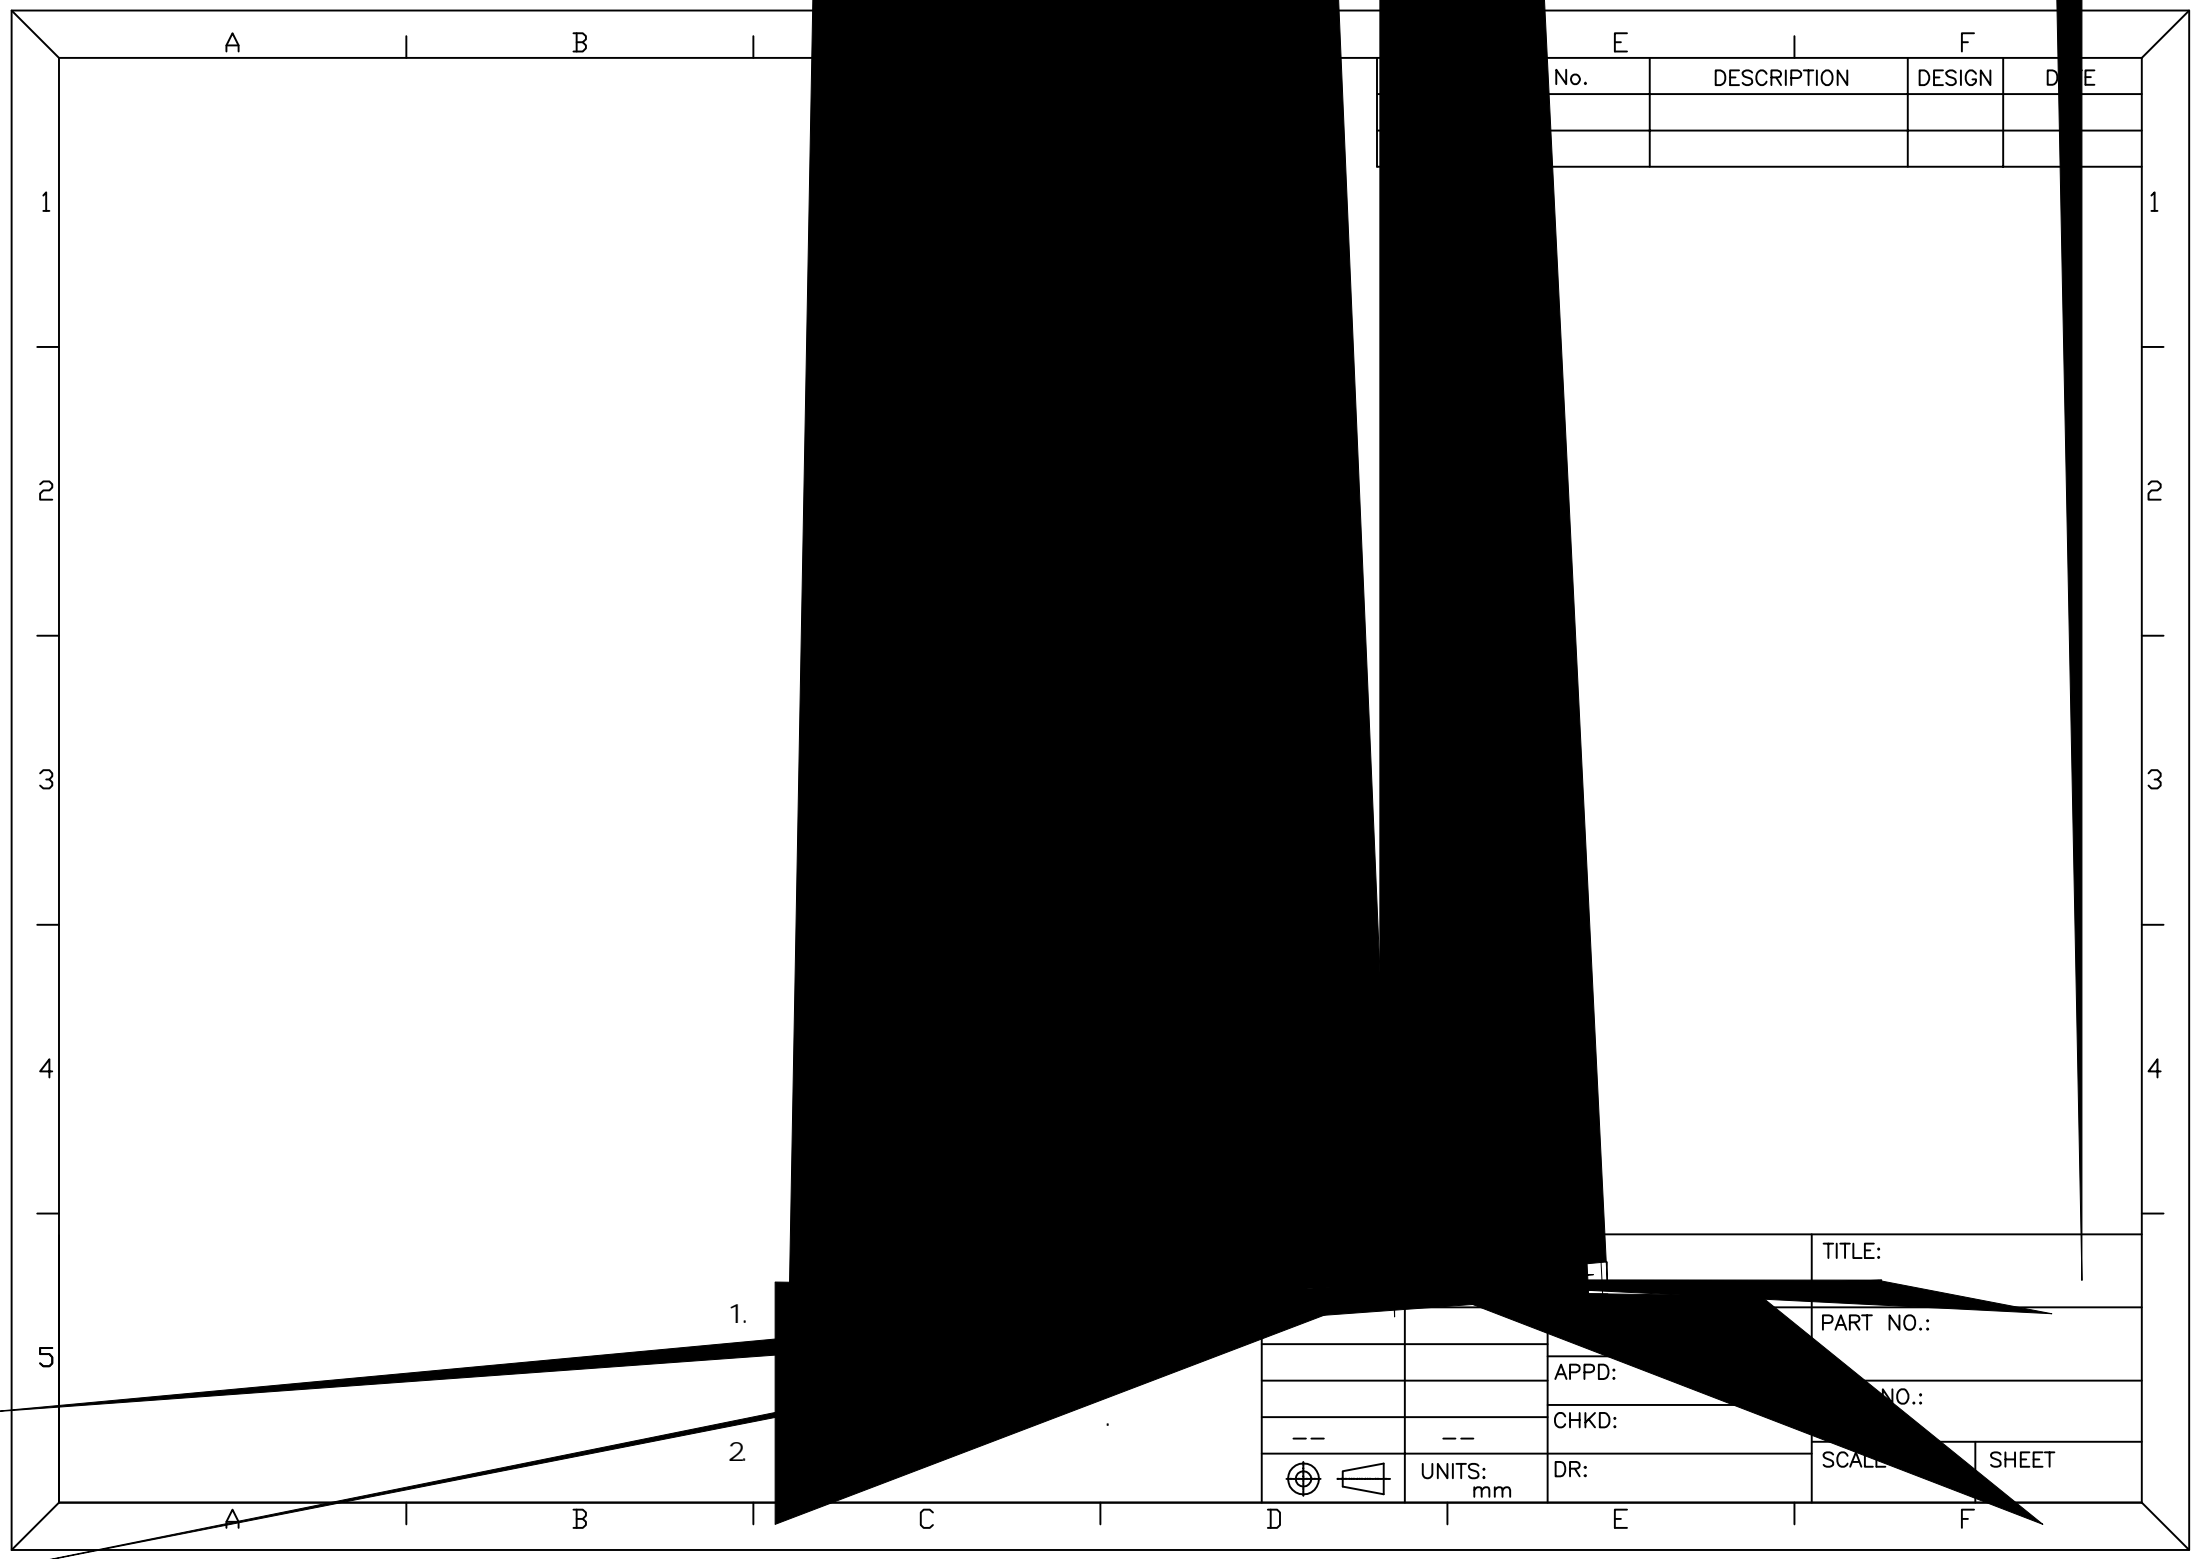

A

B

E

F

No.	DESCRIPTION	DESIGN	DATE

1

1

2

2

3

3

4

4

5

5

1.

2.

A


B

C

D

E

F



UNITS: mm

APPD:

CHKD:

DR:

TITLE:

PART NO.:

NO.:

SCALE:

SHEET