

Specifications:

Contact resistance: $\leq 20\text{m}\Omega$
Insulation resistance: $\geq 1000\text{M}\Omega$
Rated voltage: 250V AC DC
Rated current: 5.0A AC DC
v Withstand voltage: 500V AC 1min

ORDER INFORMATION:

Sp_____

ORDER INFORMATION:




王

			Brass	Sn-plated
	H	1 PCS	PA66	COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH


					Tin-plat
					UL 94-V0, COLOR:white
ITEM					

C					
B	CONTACT			Brass	Sn-plated
A	PEDESTAL		1 PCS	PA66	COLOR:WHITE
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH

				UL 94V-2, COLOR:White

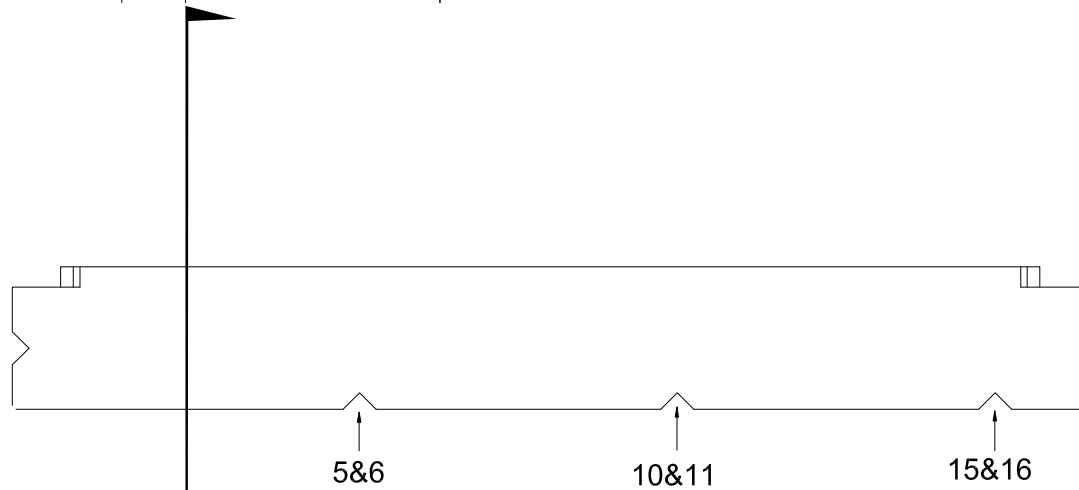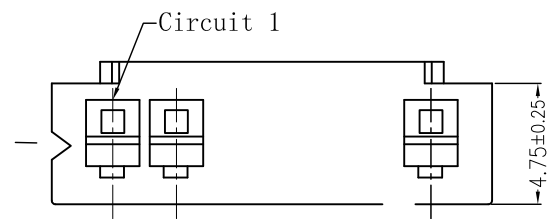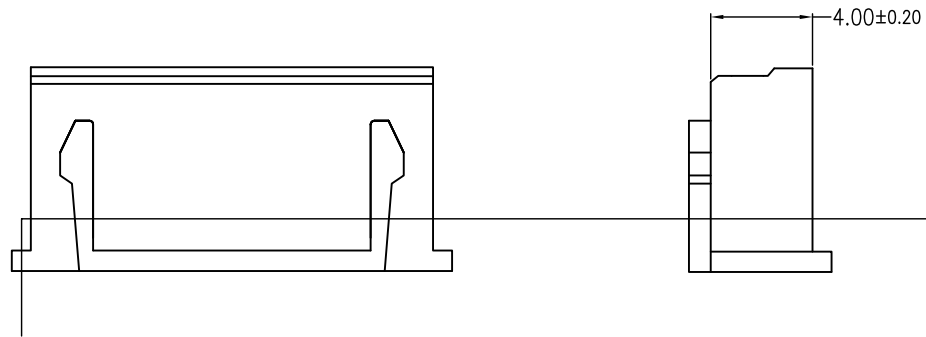

C					
B					
A	PEDESTAL		1 PCS	PA66	COLOR:WHITE
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH

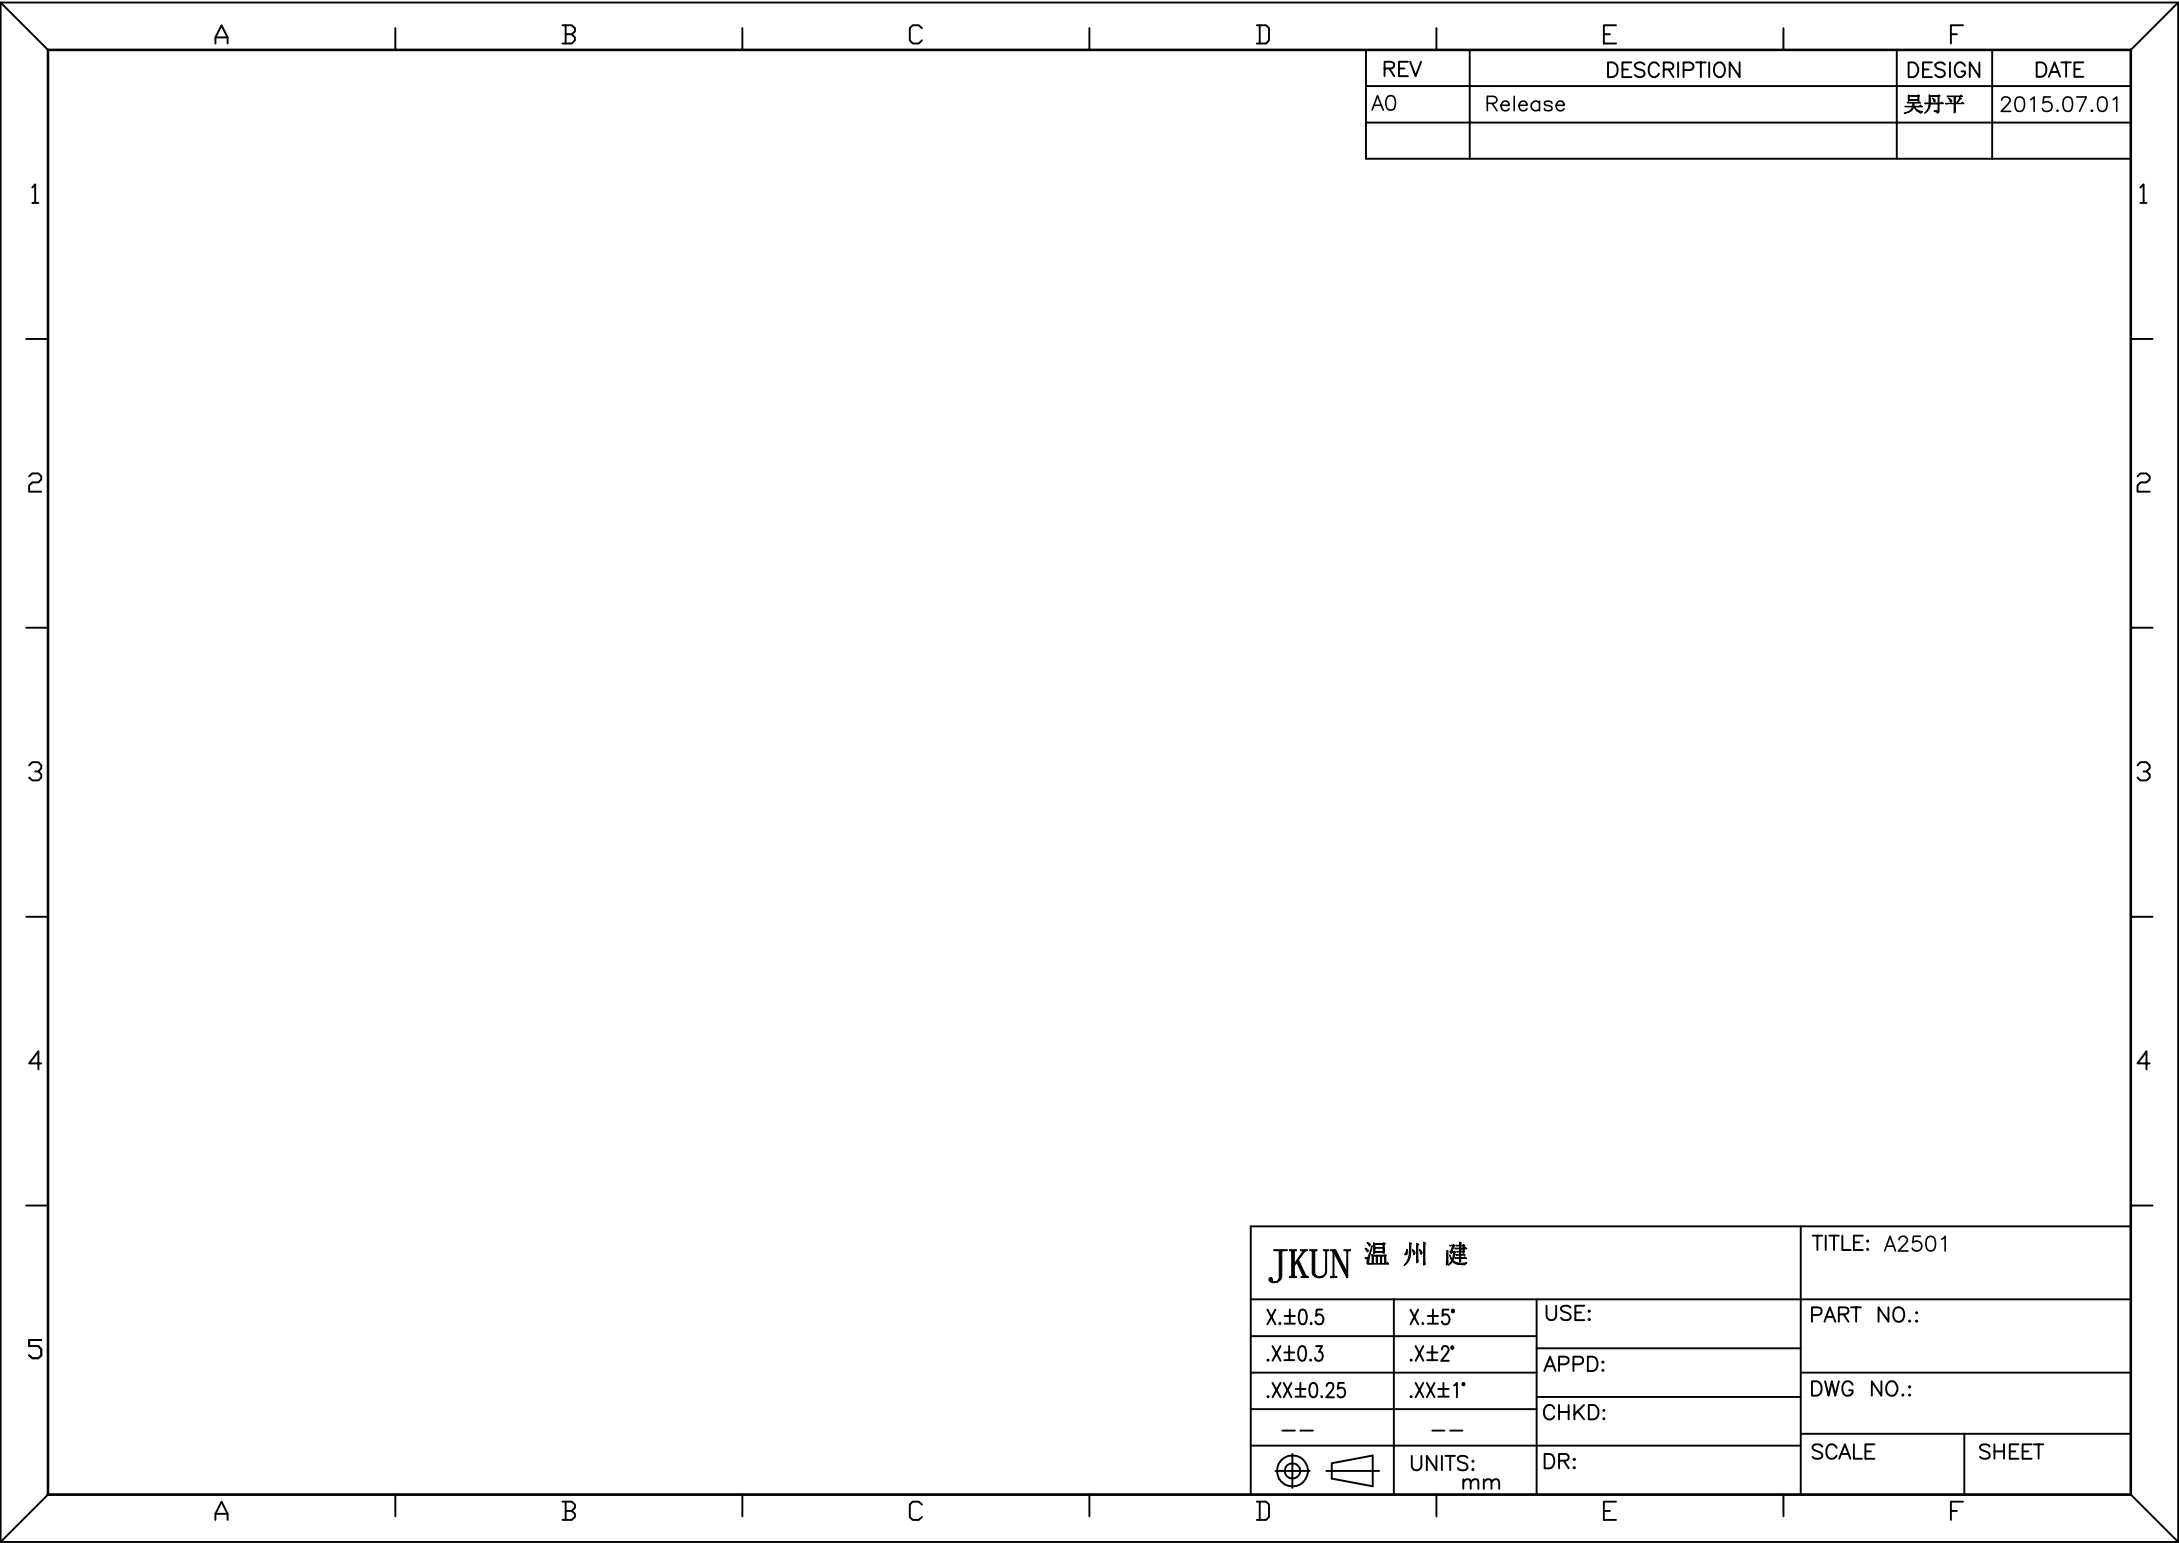

REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2015.07.01

JKUN 温州 健			TITLE: A2501	
X.±0.5	X.±5°	USE:	PART NO.:	
.X±0.3	.X±2°	APPD:		
.XX±0.25	.XX±1°	CHKD:	DWG NO.:	
--	--		SCALE	
	UNITS: mm	DR:	SHEET	

包装说明:

1.

