Specifications:

Contact resistance:≤20mΩ

Insulation resistance:⩾1000MΩ

Rated voltage:250V AC DC

Rated current:3.0A AC DC

v Withstan o l l

ORDER INFORMATION:

Sp

ORDER INFORMATION:

王

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
	H	1 PCS	PA66	COLOR:BEIGE
			Brass	Sn-plated

				Tin-plat
				UL 94-V0, COLOR:White
ITEM				

ITEM	COMPONENT		Q'TY	MATERIAL	FINISH
C					
B	CONTACT			Brass	Sn-plated
A	PEDESTAL		1 PCS	PA66	COLOR:WHITE

				UL 94V-2, COLOR:White

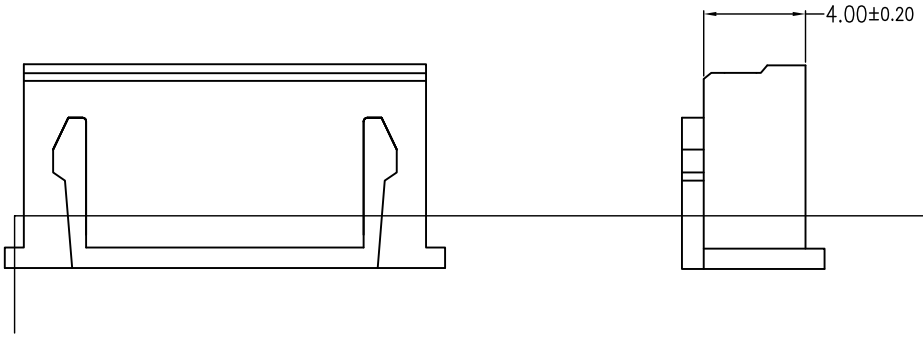

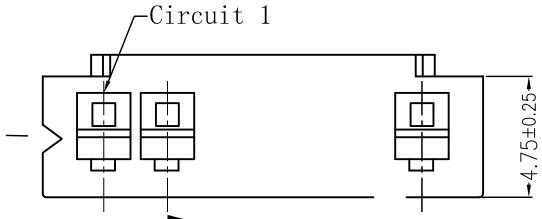

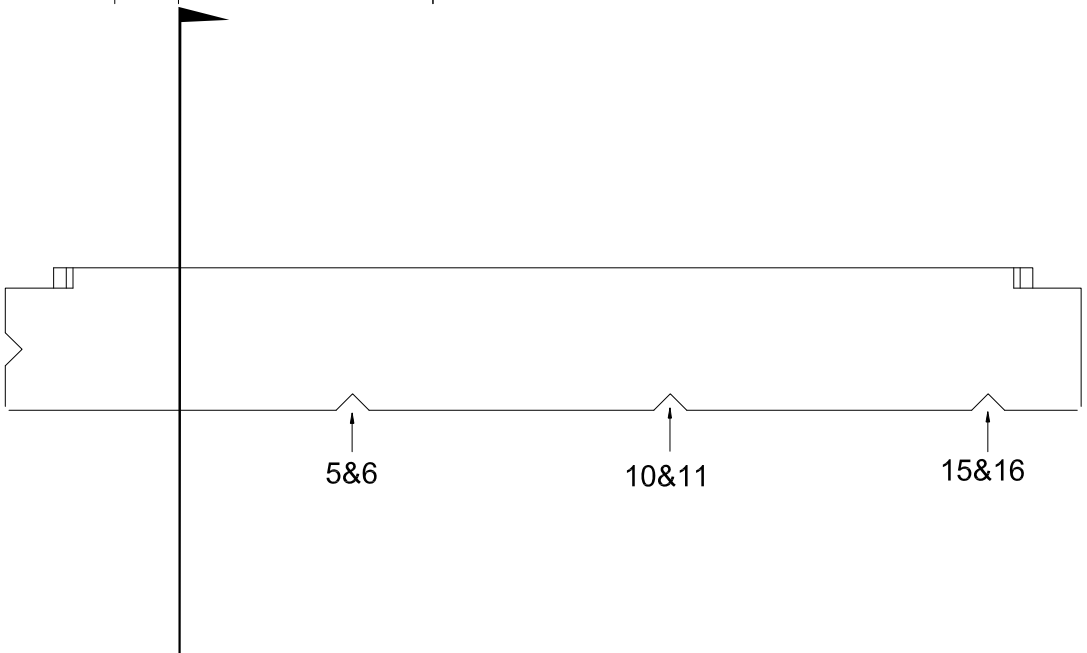

ITEM	COMPONENT		Q'TY	MATERIAL	FINISH
C					
B					
A	PEDESTAL		1 PCS	PA66	COLOR:WHITE

REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2015.07.01

JKUN 温州建			TITLE: A2501
X.±0.5	X.±5°	USE:	PART NO.:
.X±0.3	.X±2°	APPD:	
.XX±0.25	.XX±1°	CHKD:	DWG NO.:
--	--		
	UNITS: mm	DR:	SCALE / SHEET

包装说明:

1.

민