Specifications:
Contact resistance:≤20mΩ
Insulation resistance:≥1000MΩ
Rated voltage:ר

ORDER INFORMATION:

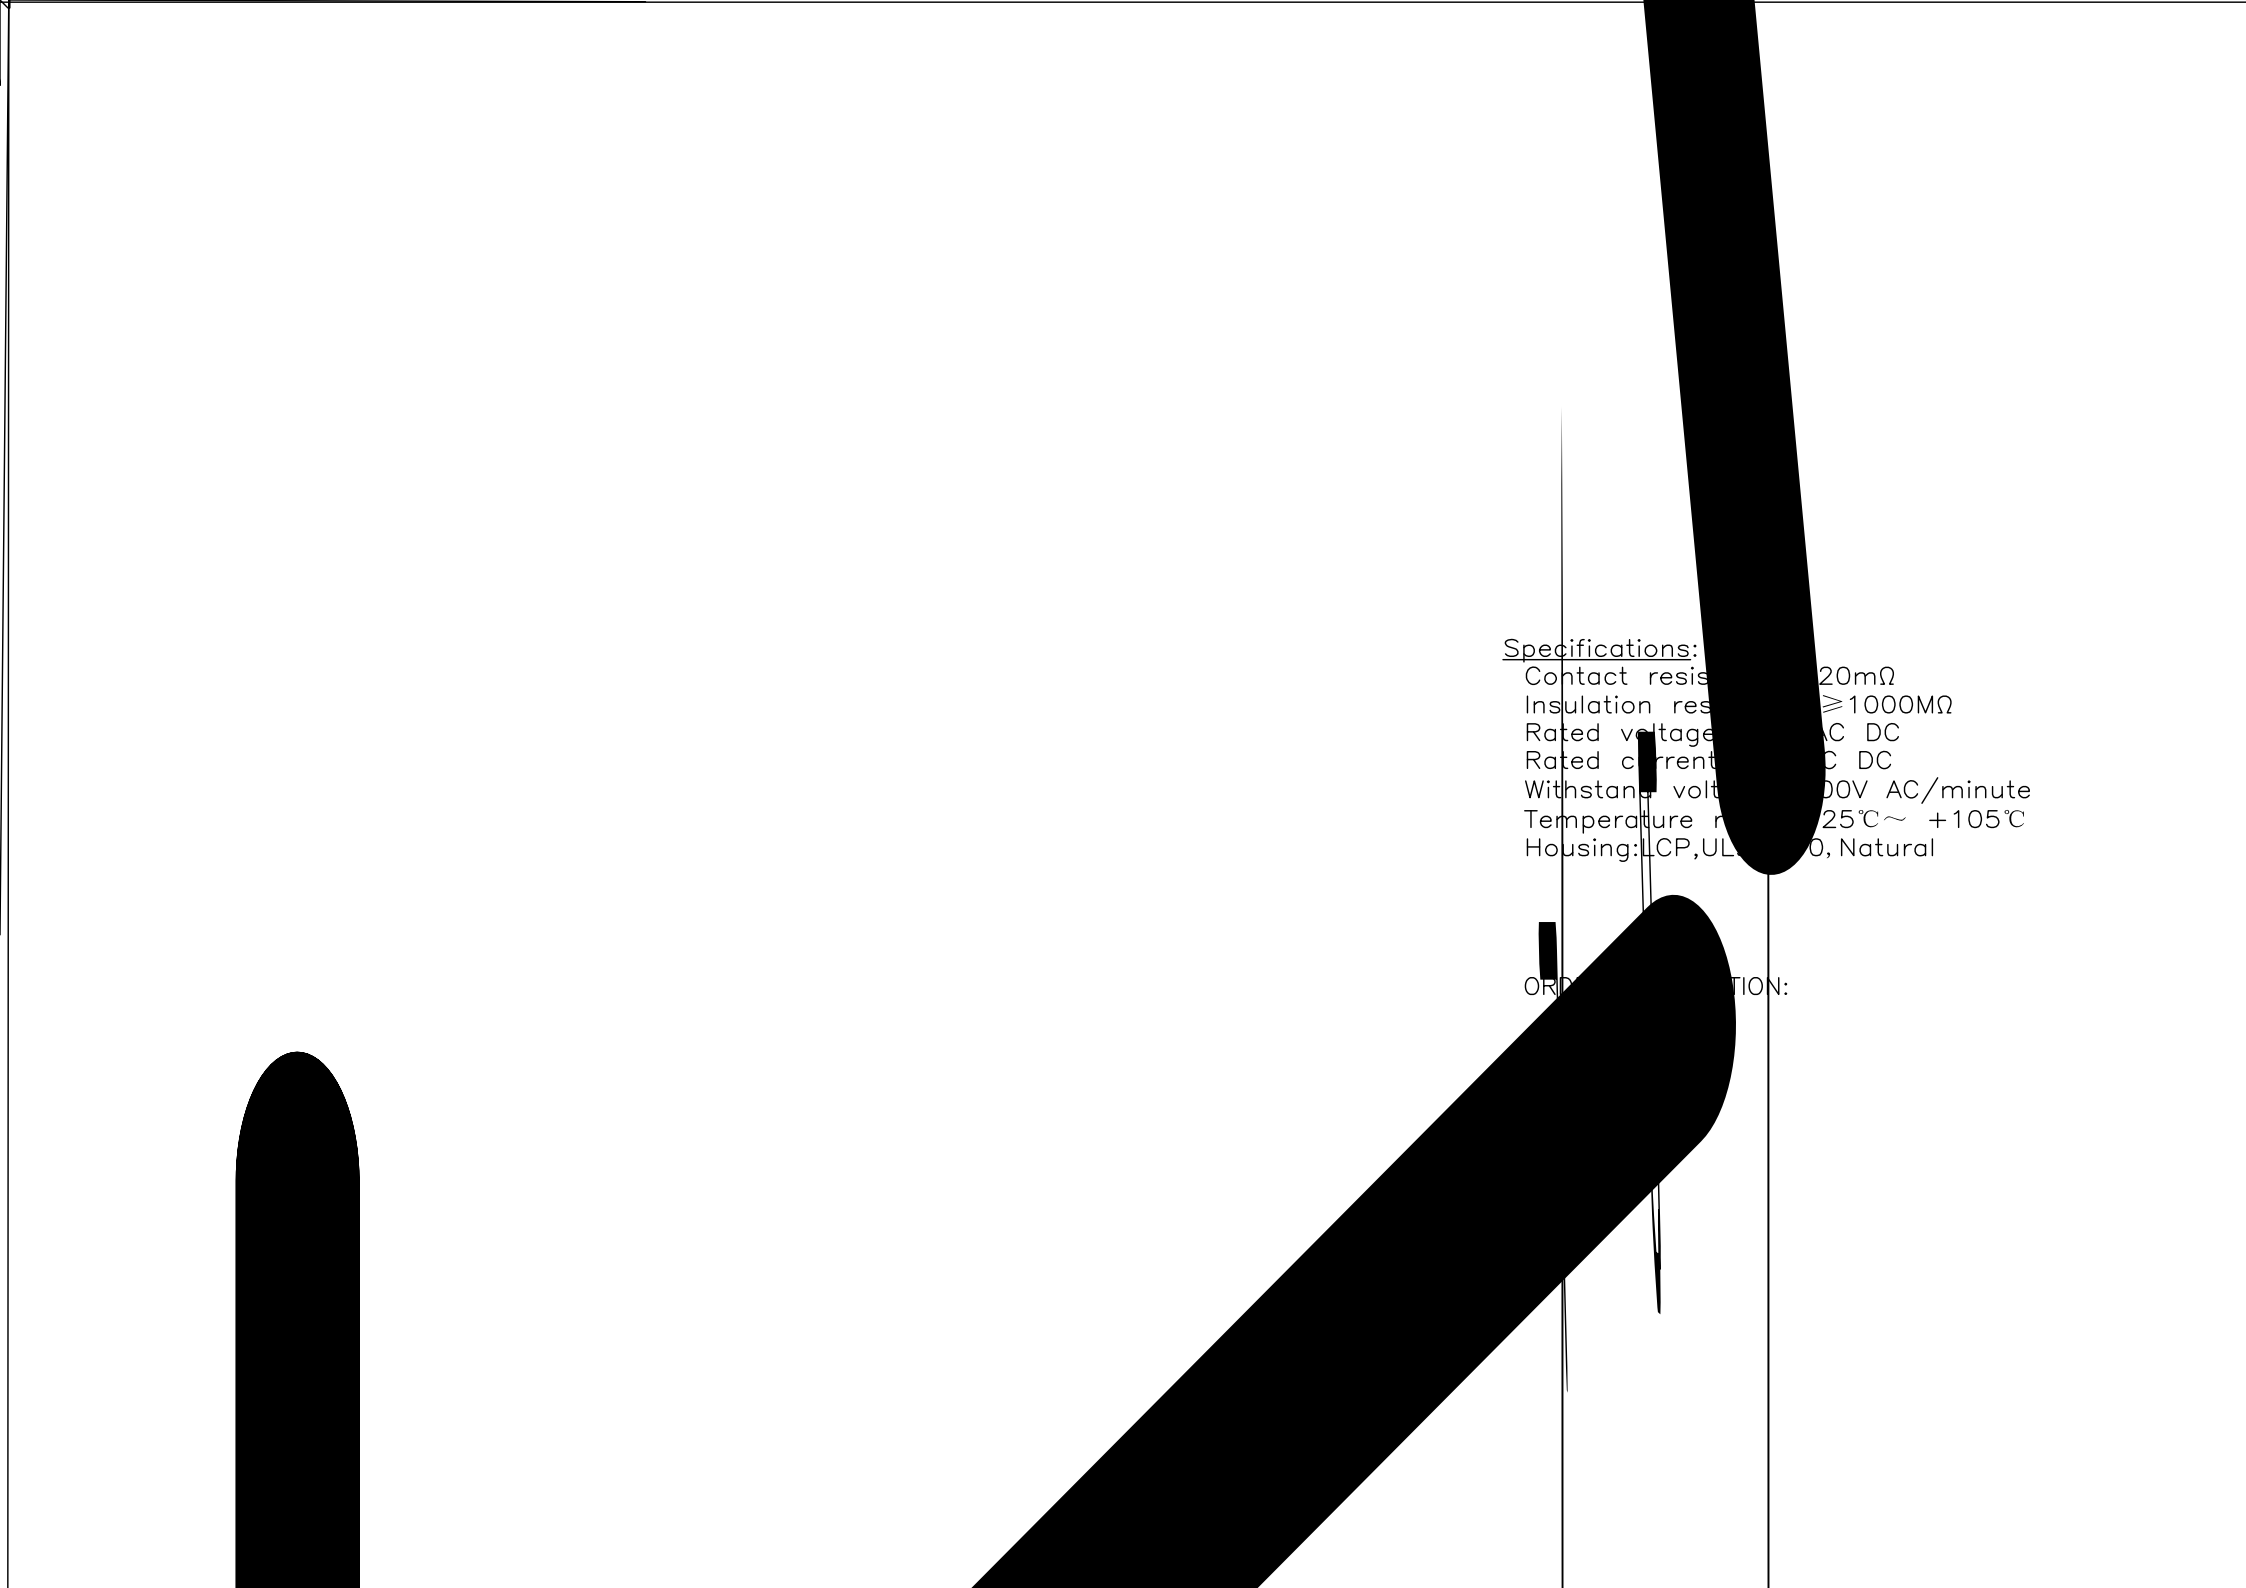
Specifications:
Contact resis 20mΩ
Insulation res ⩾1000MΩ
Rated vo tage AC DC
Rated c rrent C DC
Withstan volt 00V AC/minute
Temperature r 25℃～ +105℃
Housing:LCP,UL 0, Natural
ORD TION:

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
	PEDESTAL	1 PCS	PA66	UL 94V-0, COLOR:WHITE
	C		Brass	Sn-plated

Main Specifications

Poles): 02 to 18
Contact resistance): ≤ 20mΩ
Insulation resistance): ≥ 1000MΩ
Rated voltage):250V AC DC
Rated current):3.0A AC DC
Withstand Voltage) 1000V AC/minute
Temperature Range :-25 +85

ITEM	COMPONENT		Q'TY	MATERIAL	FINISH
C					
B	CONTACT		02~18 PCS	Brass	Sn-plated
A	PEDESTAL		1 PCS	PA66	UL 94V-0, COLOR:WHITE

	USE:	TITLE:
	APPD:	PART NO.:
	CHKD:	DWG NO.:
UNITS: mm	DR:	SCALE / SHEET

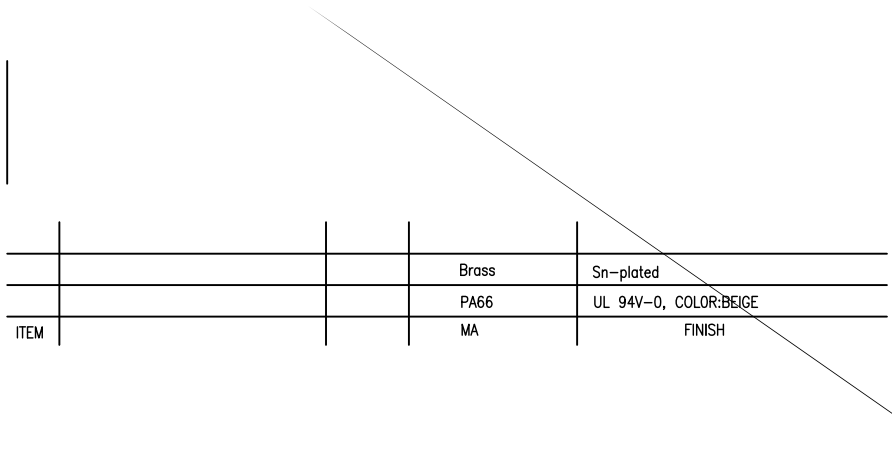
Brass
Sn-plated
PA66
UL 94V-0, COLOR:BEIGE
ITEM
MA
FINISH

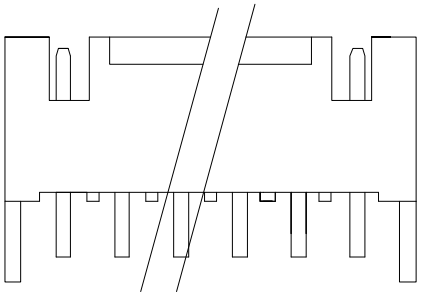



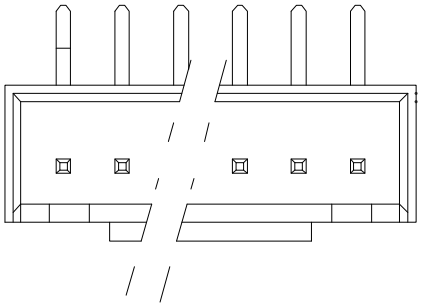

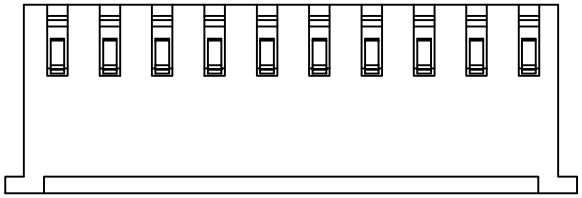



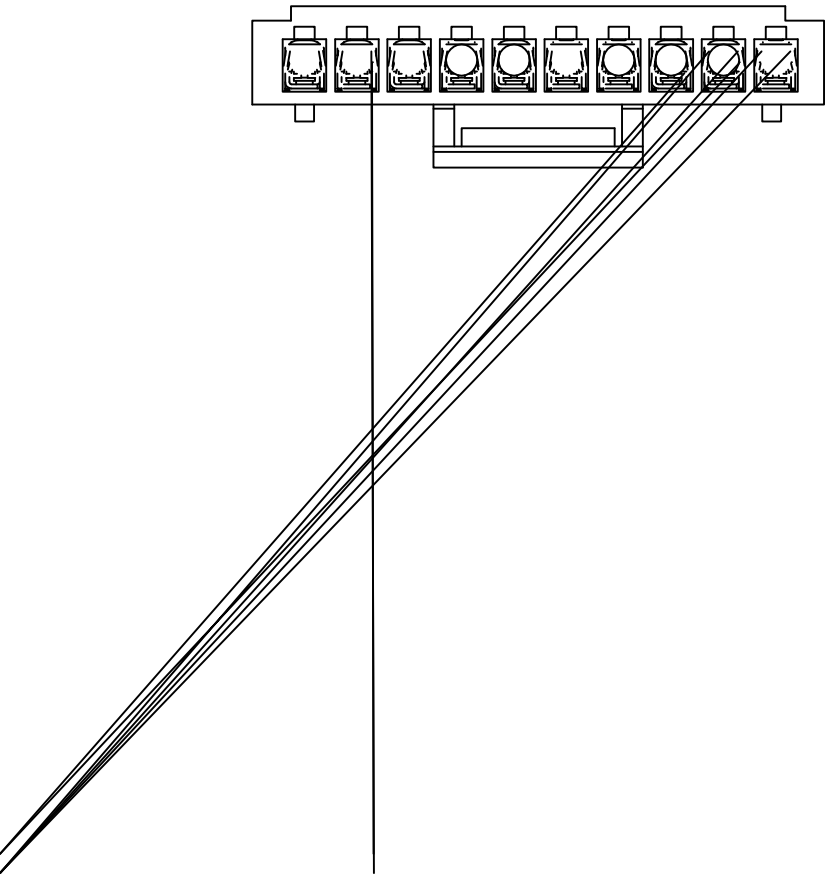

ITEM	COMPONENT		Q'TY	MATERIAL	FINISH
C					
B					
A	PEDESTAL		1 PCS	PA66	GOLOR:WHITT

민

민